

RJ45 PoE
Input



170/170
Viewing Angle



HDMI Digital
Input



BNC
In / Output



800 x 600



3-Years
Warranty

Product Feature

- Industrial level DID LCD panel, suitable for extensive 7×24 continuous works.
- Physical resolution of 800×600.
- 5ms fast response time, no image ghosting.
- Adapt newest 3D digital filtering and 3D digital noise reduction technology.
- Picture fast response; 170° wide viewing angle; Ensure that the image display is not deformed.
- High fidelity digital processing, brilliant and vivid video.
- Built-in speaker.
- Humanize Menu; Convenient Controller.

DNle digital image processing

Dynamic optimization



Contrast enhancement



Natural color



Detail enhancement



120Hz Dynamic processing




General montior



× 2



NEON monitor



DISPLAY CHARACTERISTICS

Mode Name	NEON-LED10.4-POE
Screen Size	10.4"
Active Display Area (mm)	211.2mm(W)×158.4mm(H)
Display Mode	4:3
LED Type	TFT-LED
Resolution	800 × 600
Display Color	16.7M
Pixel Pitch(mm)	0.630(H)×0.630(V)
Brightness(nits)	350cd/m ²
Contrast Ratio	500:1
Viewing Angle	170(H) /170(V)
Response Time	5ms
Backlight	LED

INPUT&OUTPUT

HDMI 2.0	1
VGA	1
BNC input	2
BNC output	1
RJ 45 input	1

VIDEO



Color System	PAL/NTSC/SECAM
Compatible HDTV input	480P,576P,720P,1080I, 1080P
3D comb filter	YES
Video Noise Reduction	YES

POWER&Mount Way

Power	DC12V ,50/60Hz or POE Input AT/AF Standard
Working Temperature	-30 to +85 °C
Power Consumption	≦10W
Menu	Chinese/English(other languages supported)
Mounting/Weight	Stand mount, VESA mount/4.5kg
MTBF	50000Hours

ACCESSORIES

INCLUDED ACCESSORIES	Industrial PSU,Screw, Cable holder, Quick start guide
----------------------	---

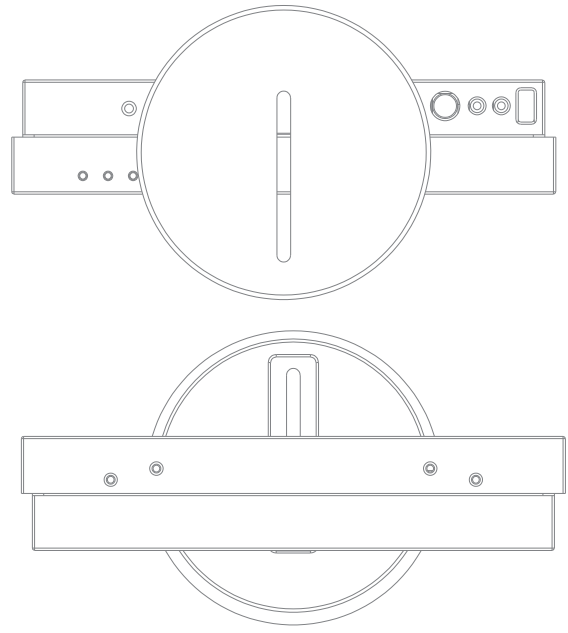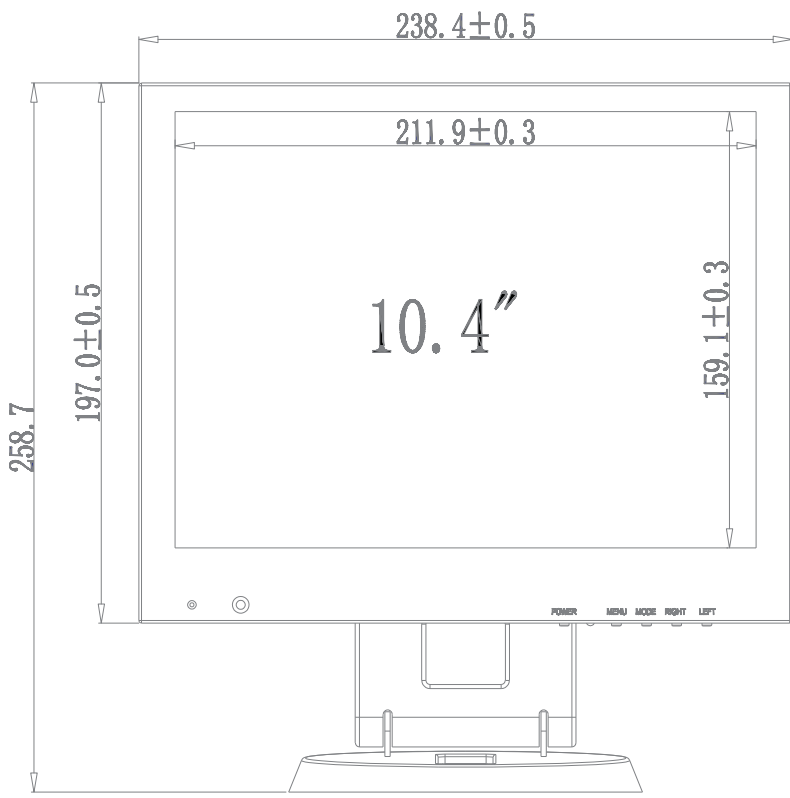

Unit:mm

